




Transmission Edge S | 5.10 m

Product number	D1C2885
Weight	0.62kg
Length	55mm
Width	145mm
Height	250mm

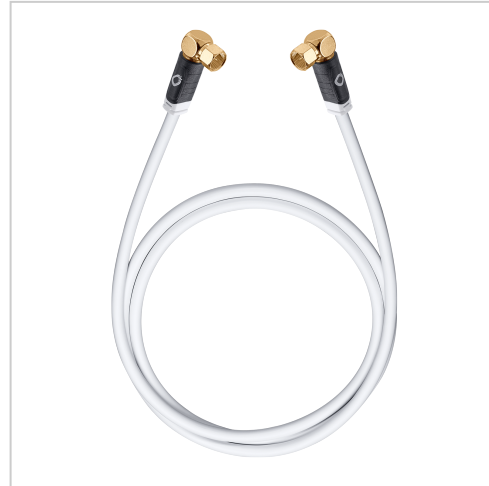

Product description

The Transmission Edge high-performance satellite cable guarantees absolutely error-free signal transmission and perfect contact reliability. The internal OFC conductor is covered with quadruple shielding comprising double aluminium and copper braiding, corresponding to shielding attenuation of 120 dB. Combined with the practical 75 ohm shielded 90° angle plugs and the gold-plated contacts, the Transmission Edge S ensures maximum signal stability.

Product properties

Product Category	antenna cable
Inner conductor material	OFC - oxygen-free copper
Features	24kt gold plated contacts, Reliable contact, 30 years warranty**
Characteristic impedance	Eliminates high-frequency irradiation
capacity	52 pF/m
Screen resolution	1080p Full HD
Plug type 2	Antenna F
Quality level	Performance
Surface condition	24 carat gold-plated contacts
Plug type 1	Antennas F-connector
Connection type	Audio, Video
Shielding	Quadruple shielding
cable length	5.10 m
Signal direction	IN/OUT
cable geometry	Round
Shielding effectiveness	120 dB
Colour	White
Shielding construction	2 x aluminium foil + 2 x copper braiding



More images

